

Patent Pending

LIGHT STICK MOUNTING CLIP
Satin Finish

Mechanical connector designed to attach our line of **Lumenrail Light Sticks** within the slotted **Cap Rail**.

Stainless Steel for use with either Stainless or Aluminum **Cap Rails**.

a	Stainless	Use with
1"	LU103	GR2166 or GR3166 Cap Rails
1 1/4"	LU102	GR2190 or GR3190 Cap Rails



BACKING PADS


Self adhesive pads for placement behind **LED Light Sticks** as a gap filler. Place 4" in from each end of the **Light Stick** and then space at 12" maximum.

Neoprene	Use with	Size
LU005-2	GR2166 or GR3166 Cap Rails	1/4" x 1/2" x 2"
LU006-2	GR2190 or GR3190 Cap Rails	3/8" x 1/2" x 2"

LIGHT STICK INSTALLATION PACKS

Includes all the items necessary to install your **LED Light Stick** into the **Slotted Cap Rail** – two **LU102** or **LU103 Mounting Clips**; four **LU005-2** or **LU006-2 Backing Pads**; one **LU001** or **LU001G Tube Insert**; four **LU20-361 Wire Nuts**; and **Instructions**.

	Use with	Tube Insert Color
LU103PKB	GR2166 or GR3166 Cap Rails	Black
LU102PKB	GR2190 or GR3190 Cap Rails	Black
LU103PKG	GR2166 or GR3166 Cap Rails	Gray
LU102PKG	GR2190 or GR3190 Cap Rails	Gray

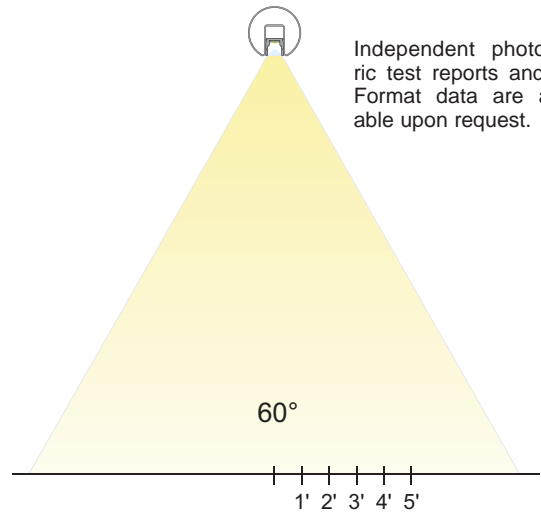

Independent photometric test reports and IES Format data are available upon request.

LIGHT OUTPUT

Transparent Lens – in footcandles

h	1 foot	2 feet	3 feet	4 feet	5 feet
34"	2.368	0.422	0.126	0.029	0.017
36"	2.175	0.528	0.092	0.034	0.019
38"	1.994	0.640	0.096	0.046	0.017
42"	1.699	0.794	0.103	0.074	0.018

LIGHT OUTPUT

Matte Lens – in footcandles

h	1 foot	2 feet	3 feet	4 feet	5 feet
34"	0.719	0.408	0.209	0.110	0.062
36"	0.656	0.392	0.208	0.113	0.064
38"	0.601	0.375	0.207	0.115	0.067
42"	0.509	0.340	0.201	0.117	0.070



WAGNER RAIL SYSTEM

GLASS RAILING

CABLE RAILING

SPIRAL STAIRS BALCONIES

ALUMINUM RAILINGS

BRASS / SS FITTINGS