



**ADJUST-A-JAW® TENSIONER – CLEVIS STYLE**  
**Type 316 Stainless Steel**

The *Adjust-A-Jaw® Tensioner* is a precision machined, sleek, streamlined tensioning device that is used where a *high-tech* look is desired. It is suitable for level runs or stair pitches. The clevis portion of the fitting attaches to the end post with a button head socket screw that threads directly into a tapped hole on one side of the clevis fitting.

Unlike common turnbuckles, the *Adjust-A-Jaw® Tensioner* has no sharp edges, no crevices to collect dust and dirt, no large areas of exposed threads or exposed swaged shanks, and nothing that will scratch or snag. See the tabulated drawing to determine how to interface this fitting with your end post, or use our *Fixed Tab* or *Threaded Tab* fittings shown on page 54 of this catalog.

The Clevis has a male thread that mates with the female thread within the Body. The *Invisiware® Swaging Ferrule* is swaged onto the *Cable* and holds the cable inside the Body. The Body rotates on the cable and provides a considerable amount of take-up during tensioning with an open-end wrench. After tensioning, the *Lock Nut* locks the assembly in place.

Cable Size	D	E	G	K	Closed L	Open L	Ln	Lr	T	Use with Screw # (included)	Use with Ferrule #	Stainless Steel
1/8"	.260"	1/4-28	.260"	.560"	4.300"	5.990"	.375"	2.750"	5/16-24 LH	CRSC6	CRF4	CRAJ62
3/16"	.260"	1/4-28	.260"	.560"	4.300"	5.990"	.375"	2.750"	5/16-24 LH	CRSC6	CRF6	CRAJ62
1/4"	.390"	3/8-24	.313"	.750"	4.870"	6.430"	.500"	3.000"	7/16-20 LH	CRSC8	CRF8	CRAJ82
5/16"	.390"	3/8-24	.348"	.870"	6.740"	9.280"	.620"	4.500"	9/16-18 RH	CRSC8	CRF10	CRAJ122
3/8"	.390"	3/8-24	.348"	.870"	6.740"	9.280"	.620"	4.500"	9/16-18 RH	CRSC8	CRF12	CRAJ122

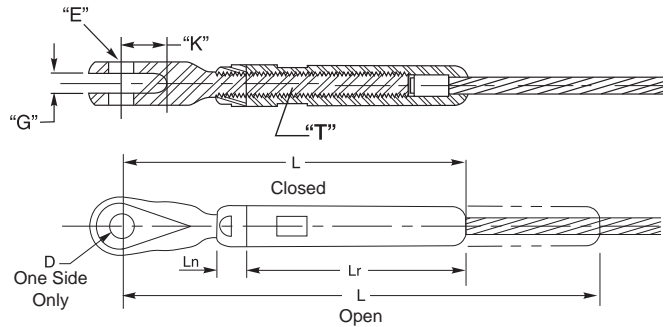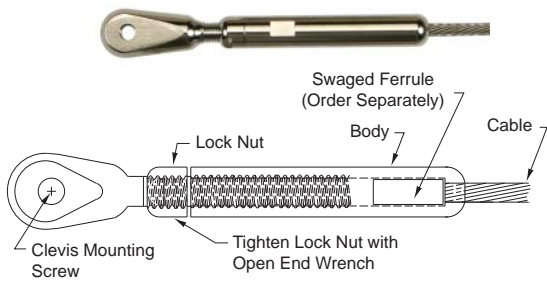

All metals have a recycled content and high reclamation rate. Contact Wagner for data relating to your specific product selections.



Photos courtesy of Custom Architectural Products Dunwoody, GA

**ADJUST-A-BODY™ WITH CONCRETE BOLT TENSIONER**

Similar to the Adjust-A-Body™ With Hanger Bolt Tensioner, it screws into a *Red Head* brand concrete anchor – available from your industrial supplier. It is an easy, practical way to attach your tensioner to a concrete wall. Adjusts with an open end wrench.

Cable Size	S	T	Ls	Lt	Loq	Ln	Lr	D	Red Head® Anchor* Steel	Red Head® Anchor* Stainless	Use with Ferrule #	Stainless Steel
1/8"	3/8-16	5/16-24 LH	.500"	2.313"	3.188"	.375"	2.750"	.500"	RL-38	SSRM-38	CRF4	CRAJAB6
3/16"	3/8-16	5/16-24 LH	.500"	2.313"	3.188"	.375"	2.750"	.500"	RL-38	SSRM-38	CRF6	CRAJAB6
1/4"	1/2-13	7/16-20 LH	1.125"	2.500"	3.938"	.500"	3.000"	.625"	RL-12	SSRM-12	CRF8	CRAJAB8

