


WAGNER RAIL SYSTEM

**ADJUST-A-BODY™ WITH THREADED EYE TENSIONER**  
**Type 316 Stainless Steel**

Similar to the *Adjust-A-Jaw® Tensioner*, except it costs a lot less than the clevis-style *Adjust-A-Jaw® Tensioner*. See the tabulated drawing to determine how to interface this fitting with your end post or use our *Fixed Tab* or *Threaded Tab* fittings shown on page 54 of this catalog. Tension with an open-end wrench.

Cable Size	E	A	B	S	T	Lt	Ln	Lr	D	Use with Screw # (included)	Use with Ferrule #	Stainless Steel
1/8"	1/4-28	.233"/.229"	.500"	.440"	5/16-24 LH	2.000"	.375"	2.750"	.500"	CRSC6	CRF4	CRAJTE6
3/16"	1/4-28	.233"/.229"	.500"	.440"	5/16-24 LH	2.000"	.375"	2.750"	.500"	CRSC6	CRF6	CRAJTE6
1/4"	3/8-24	.295"/.285"	.844"	.680"	7/16-20 LH	2.500"	.500"	3.000"	.625"	CRSC8	CRF8	CRAJTE8

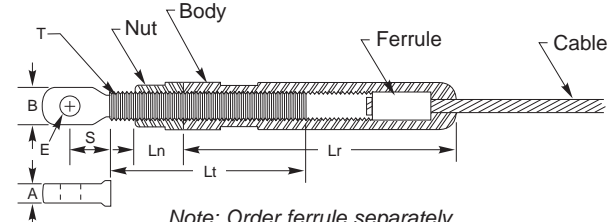


GLASS RAILING

CABLE RAILING

**ADJUST-A-BODY™ WITH THREADED BOLT TENSIONER**  
**Type 316 Stainless Steel**

Similar to the *Adjust-A-Body™ With Hanger Bolt Tensioner*, it screws into a drilled and tapped hole in your steel end post and adjusts with an open end wrench. A real money-saver because there is no need for special tees with holes, welded on tabs or any other mounting device – and it's about half the price of the clevis-style *Adjust-A-Jaw® Tensioner*.

Cable Size	S	T	Ls	Lt	Loq	Ln	Lr	D	Use with Ferrule #	Stainless Steel
1/8"	5/16-24	5/16-24 LH	.375"	2.000"	2.625"	.375"	2.750"	.500"	CRF4	CRAJT6
3/16"	5/16-24	5/16-24 LH	.375"	2.000"	2.650"	.375"	2.750"	.500"	CRF6	CRAJT6
1/4"	5/16-24	7/16-20 LH	.375"	2.500"	3.125"	.500"	3.000"	.625"	CRF8	CRAJT8

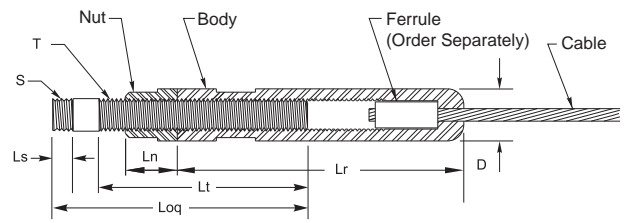

Recommended for level runs and when you are using a minimum schedule 80 pipe end post or a square or rectangular steel end post with a minimum .250" wall.


SPIRAL STAIRS BALCONIES

ALUMINUM RAILINGS

**ADJUST-A-BODY™ WITH HANGER BOLT TENSIONER**  
**Type 316 Stainless Steel**

Similar to the *Adjust-A-Jaw® Tensioner*, except it screws right into your wooden end post. No need for special mounting hardware. A sleek, economical tensioning device that is easy to install, adjusts with an open-end wrench. Now available with a 1 1/2" longer hanger bolt for 1/8" or 3/16" **Cable**.

Cable Size	S	T	Ls	Lp*	Lt	Loq	Ln	Lr	D	Use with Ferrule #	Stainless Steel
1/8"	5/16"	5/16-24 LH	1.500"	.250"	2.000"	3.750"	.375"	2.750"	.500"	CRF4	CRAJB6
3/16"	5/16"	5/16-24 LH	1.500"	.250"	2.000"	3.750"	.375"	2.750"	.500"	CRF6	CRAJB6
1/4"	7/16"	7/16-20 LH	2.000"	.250"	2.500"	4.750"	.500"	3.000"	.625"	CRF8	CRAJB8
1/8"	5/16"	5/16-24 LH	1.500"	1.750"	2.000"	5.250"	.375"	2.750"	.500"	CRF4	CRAJB6L
3/16"	5/16"	5/16-24 LH	1.500"	1.750"	2.000"	5.250"	.375"	2.750"	.500"	CRF6	CRAJB6L

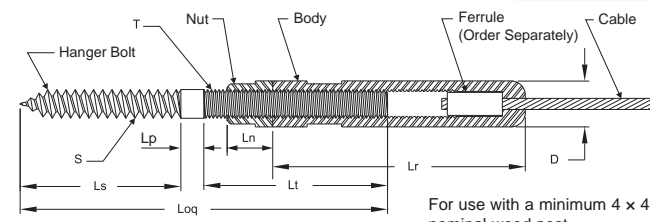

\*Longer shaft – Lp – for use when mounting post has a fascia covering.



BRASS / SS FITTINGS