


WAGNER RAIL SYSTEM

**Ultra-tec® Clip-on FIXED JAW for pre-swaged cable Type 316 Stainless Steel**

Same as our regular **Ultra-tec® Fixed Jaw**, except the cable attaches with a special clip that is installed by hand. All fittings are swaged on the cable at the factory, so no field swaging is required. An **Adjust-A-Jaw®** or **Adjust-A-Body™** style tensioner or **Invisiware® Receiver** is used on the opposite end. Order using part numbers below and check with the factory to determine Cable lengths to be provided with swaged fittings. Available for 1/8" and 3/16" Cable only. Refer to **Clip-On Stop** on page 53.



Cable Size	D	E	G	K	L	Use with Screw # (included)	Use with Ferrule #	Stainless Steel
1/8"	.260"	1/4-28	.260"	.560"	1.750"	CRSC6	CRF4	CRFJC2-6
3/16"	.260"	1/4-28	.260"	.560"	1.750"	CRSC6	CRF6	CRFJC2-6

Note: Order ferrule separately.

GLASS RAILING

**INVISIWARE® THREADED TAB Type 316 Stainless Steel**


Here's a real time and money-saver. The **Invisiware® Threaded Tab** screws into a drilled and tapped hole on the inside wall of the end post. You save the expense of welding tees or tabs onto your end post, for mounting **Adjust-A-Jaw®** or **Adjust-A-Body™** Tensioners or **Ultra-tec® Fixed Jaws**.

Recommended only when you are using a minimum schedule 80 pipe end post or a square or rectangular steel end post with a minimum .250" wall.

CABLE RAILING

Cable Size	H	S	T	A	B	L	Use with Stud # (included)	Stainless Steel
1/8"	.265"	.500"	.233"/.229"	.813"	.313"	1.250"	CRS4	CRTT6B
3/16"	.265"	.500"	.233"/.229"	.813"	.313"	1.250"	CRS6	CRTT6B
1/4"	.390"	.625"	.295"/.285"	1.250"	.375"	1.625"	CRS8	CRTT8B
5/16"	.390"	.625"	.295"/.285"	1.250"	.375"	1.625"	CRS8	CRTT8B
3/8"	.390"	.625"	.295"/.285"	1.250"	.375"	1.625"	CRS8	CRTT8B


SPIRAL STAIRS BALCONIES

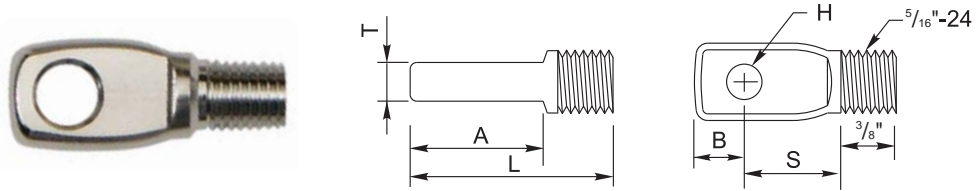

ALUMINUM RAILINGS

**INVISIWARE® EXTENDED LENGTH THREADED TAB**

Extended length, same as above except there is no need to thread the hole in your end post. Cut to desired length and secure to end post with **Acorn Nut** and thread sealant or **Lido-Weld Adhesive** – see page 97. **Acorn Nut – CRAN37524S** – is included.



BRASS / SS FITTINGS

**INVISIWARE® FIXED TAB Steel or Stainless Steel**

Welded into an end post to make a strong tab for use in mounting an **Adjust-A-Jaw®** or **Adjust-A-Body™** Tensioner or **Ultra-tec® Fixed Jaw**. The **Invisiware® Fixed Tab** is cut to length as necessary, inserted in a hole drilled through the post and welded to the outside wall. The welded surface is then ground to the post's original contour, thus hiding the weld.

Cable Size	D	H	S	T	L	Steel	Stainless Steel
1/8"	.375"	.265"	.440"	.233"/.229"	3.110"	CRFT65A	CRFT65B
3/16"	.375"	.265"	.440"	.233"/.229"	3.110"	CRFT65A	CRFT65B
1/4"	.562"	.390"	.680"	.295"/.285"	3.000"	CRFT85A	CRFT85B

