


CABLE BRACE ORDER FORM

Please use a separate worksheet for each Brace Style.



1/4" x 1" flat bar Cable Braces are used to support the cables between end or intermediate posts to keep the cable from flexing excessively when a load is applied.

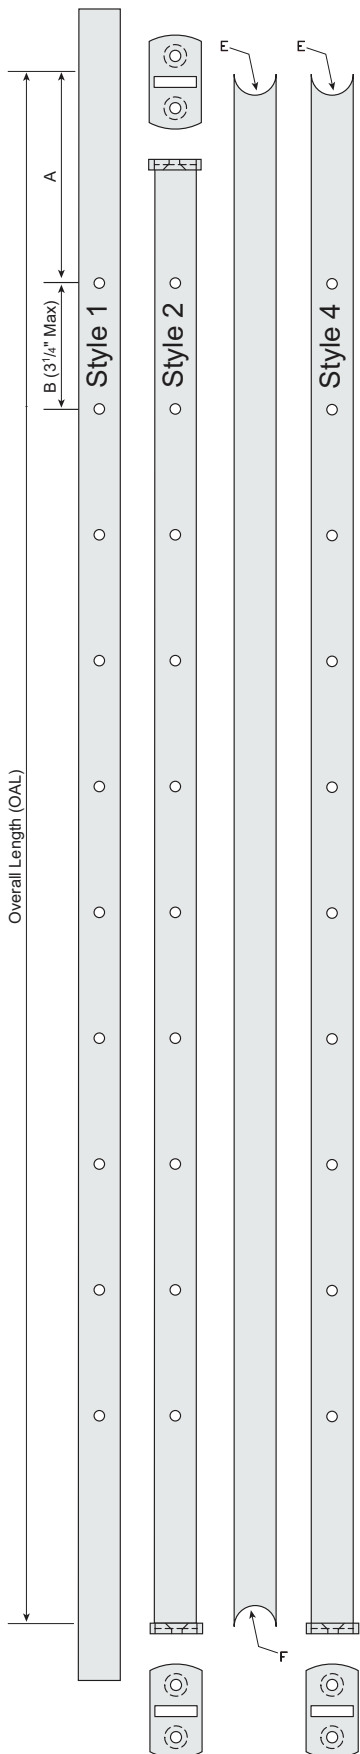

Cable Brace Specifications (Please include CAD drawing if available.):

Number of Cable Braces: _____

Brace Style (Select One):

- Style 1 – No Flange or Cope
- Style 2 – Flange (Indicate Top, Bottom or Both)
 - Top Bottom Both
- Style 3 – Coped (Indicate Top, Bottom or Both)
 - Top Dia. of Rail (E): _____ Bottom Dia. of Rail (F): _____ Both
- Style 4 – Coped Top Dia. of Rail (E): _____ / Flange Bottom

Material (please check one):

- Steel
- #4 Stainless Steel, Satin Finish

Overall Length (OAL): _____

Top of Brace to First Hole (A): _____

Equal Spacing Between Holes (3/4" Max) (B): _____

Diameter of Holes (D): _____

Number of Holes (Q): _____

Contact Name: _____ Date: _____

Company: _____

Address: _____

City: _____ State: _____ Zip Code: _____

Phone Number: _____ Fax Number: _____

Email Address: _____

This section is for Wagner's quotation to you and for your acceptance.

Wagner can manufacture and ship your Cable Braces as follows:

Quantity: _____ @ \$ _____ = \$ _____ plus freight.

Shipment: _____ days after receipt of your acceptance.

Quoted/Submitted by: _____ Date: _____

To accept this Quotation, please sign below and fax to (414) 214-8321.

Customer Approval: _____ Date: _____