


**ULTRA-TEC® LAG EYE**  
**Type 304 Stainless Steel**

A convenient, easy-to-install means for attaching an **Adjust-A-Jaw®** or **Adjust-A-Body™** **Tensioner** or **Ultra-tec® Fixed Jaw** to a wood post.

For use with a minimum 4" x 4" nominal wood post.

Cable Size	G	T	S	L	P	Stainless Steel
1/8"	.233"/.229"	.253"	.625"	1.500"	.500"	<b>CRLE6</b>
3/16"	.233"/.229"	.253"	.625"	1.500"	.500"	<b>CRLE6</b>
1/4"	.255"/.265"	.385"	1.188"	2.000"	.680"	<b>CRLE8</b>
5/16"	.233"/.229"	.253"	.625"	3.000"	.500"	<b>CRLE6L</b>
3/8"	.233"/.229"	.253"	.625"	3.000"	.500"	<b>CRLE6L</b>

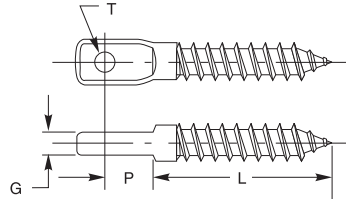


Victor • Polishing

**INVISIWARE® WELDED RECEIVER**  
**Steel or Stainless Steel**

A fixed end, non-tensioning device, the **Invisiware® Welded Receiver** provides a sturdy, threaded receptacle in the end post for an **Invisiware® Swaging Stud**. The **Invisiware® Welded Receiver** is cut to length as necessary, inserted in a hole drilled through the post and welded to the outside wall. The welded surface is then ground to the post's original contour, thus hiding the weld.

Cable Size	D	T	Use with Stud #	Steel	Stainless Steel
1/8"	.437"	5/16-24	<b>CRS4</b>	<b>CRWR65A</b>	<b>CRWR65B</b>
3/16"	.437"	5/16-24	<b>CRS6</b>	<b>CRWR65A</b>	<b>CRWR65B</b>
1/4"	.531"	7/16-20	<b>CRS8</b>	<b>CRWR85A</b>	<b>CRWR85B</b>

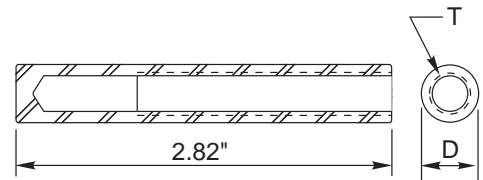

**SCREWS**  
**Type 316 Stainless Steel**

For use with threaded fittings, as noted.



Cable Size	Screw Size	Stainless Steel
1/8"	1/4-28 x 1/2"	<b>CRSC6</b>
3/16"	1/4-28 x 1/2"	<b>CRSC6</b>
1/4"	3/8-24 x 3/4"	<b>CRSC8</b>
5/16"	3/8-24 x 3/4"	<b>CRSC8</b>
3/8"	3/8-24 x 3/4"	<b>CRSC8</b>

**WASHERS**

Available in Stainless Steel and Delrin® plastic.

Cable Size	Outside Diam.	Inside Diam.	Stainless Steel	Delrin® Plastic
1/8"	59/64"	15/32"	<b>CR716SAE</b>	<b>CRWR6B</b>
3/16"	59/64"	19/32"	<b>CR716SAE</b>	<b>CRWR6B</b>
1/4"	1 1/16"	17/32"	<b>CR050SAE</b>	<b>CRWR8B</b>



Sue • Bending

WAGNER RAIL SYSTEM

GLASS RAILING

CABLE RAILING

SPIRAL STAIRS BALCONIES

ALUMINUM RAILINGS

BRASS / SS FITTINGS